


## Yale YK Wire Rope Hoist

Top-Running Hoist and Trolley

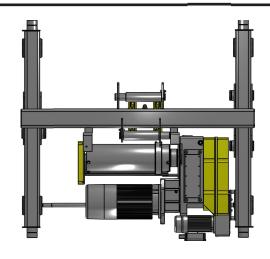

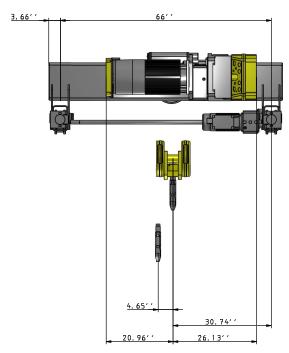

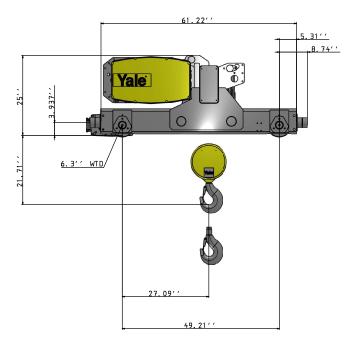

Customer Name: QUOTATIONS CUSTOMER

Quote Number: J5RNF, Line: 2

Revision Number: 1 Quote Date: 5/5/2020

## **TECHNICAL DATA**

Hoist Platform **GN Wire Rope Hoist** Hoist Model Number YKC-T12-020S413-2-66

Rated Lift Capacity 12.5 U.S. tons Maximum Lift Distance 20 ft (6.1 m)

Maximum Lifting Speed 13 ft/min (3.96 m/min) Reeving Style 4-Part Single-Reeved

Hoist Control Type Two-Speed

Hoist Suspension Type Top Running Low Profile

Bridge Rail Size Min. (lb/yd) 25# 40# Bridge Rail Size Max.

Trolley Traverse Speed (60Hz)

80 ft/min (24.38 m/min)

Trolley Control Type Two-Speed **Trolley Bumpers** Included Hoist Duty Classification HMI Class H4 460V / 3ph / 60Hz Operating Voltage Control Voltage 120 VAC

Trolley Motor HP 2.0 Trolley Motor Qty 1

Base Weight of Hoist (Ibs)

2064.51

This document was generated by COMPASS® by Columbus McKinnon Corporation Getzville, New York USA

This drawing is intended for preliminary reference use only and depicts general clearance dimensions based on standard product configuration. If your application includes specific critical dimensional constraints it is recommended. that an Approval Drawing be requested at time of order.



